

# SFP-1G-ZX

**1G ZX SFP SM 1550nm 80km**

## Features

- Data-rate of 155Mbps operation
- DFB 1550nm wavelengths laser and PIN photodetector for 80km transmission
- Compliant with SFP MSA and SFF-8472 with duplex LC receptacle
- Digital Diagnostic Monitoring:
- Internal Calibration or External Calibration
- Compatible with RoHS
- +3.3V single power supply
- Operating case temperature:
- Standard : 0 to +70°C  
Industrial : -40 to +85°C

## Applications


- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Switched backplane applications
- Router/Server interface
- Other optical transmission systems

## Description

The SFP transceivers are high performance, cost effective modules supporting data-rate of 155Mbps and 80km transmission distance with SMF.

The transceiver consists of three sections: a uncooled DFB laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

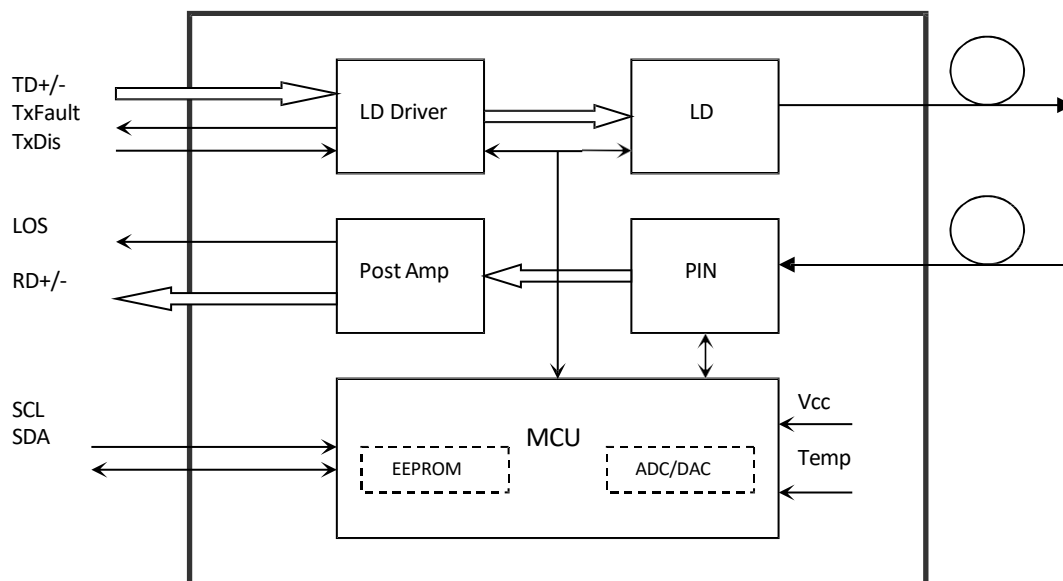

## Absolute Maximum Ratings

**Table 1 - Absolute Maximum Ratings**

| Parameter           | Symbol | Min  | Max | Unit |
|---------------------|--------|------|-----|------|
| Supply Voltage      | Vcc    | -0.5 | 4.5 | V    |
| Storage Temperature | Ts     | -40  | +85 | °C   |
| Operating Humidity  | -      | 5    | 95  | %    |

## Recommended Operating Environment

**Table 2 - Recommended Operating Environment**

| Parameter                  | Symbol | Min  | Typical | Max  | Unit |
|----------------------------|--------|------|---------|------|------|
| Operating Case Temperature | Tc     | 0    |         | +70  | °C   |
| Power Supply Voltage       | Vcc    | 3.13 | 3.3     | 3.47 | V    |
| Power Supply Current       | Icc    |      |         | 300  | mA   |
| Data Rate                  |        |      | 155     |      | Mbps |

## Optical and Electrical Characteristics

**SFP-03SM55-80C: (DFB and PIN, 80km Reach)**

**Table 4 - Optical and Electrical Characteristics**

| Parameter                        |         | Symbol                                          | Min  | Typical | Max             | Unit     | Notes |
|----------------------------------|---------|-------------------------------------------------|------|---------|-----------------|----------|-------|
| Transmitter                      |         |                                                 |      |         |                 |          |       |
| Centre Wavelength                |         | $\lambda_c$                                     | 1520 | 1550    | 1580            | nm       |       |
| Spectral Width (-20dB)           |         | $\Delta\lambda$                                 |      |         | 1               | nm       |       |
| Side Mode Suppression Ratio      |         | SMSR                                            | 30   |         |                 | dB       |       |
| Average Output Power             |         | P <sub>out</sub>                                | 0    |         | 5               | dBm      | 1     |
| Extinction Ratio                 |         | ER                                              | 10   |         |                 | dB       |       |
| Jitter Generation (RMS)          |         |                                                 |      |         | 0.01            | UI       |       |
| Jitter Generation (PK-PK)        |         |                                                 |      |         | 0.1             | UI       |       |
| Output Optical Eye               |         | Compliant Telcordia GR-253-CORE and ITU-T G.957 |      |         |                 |          |       |
| Optical Rise/Fall Time (20%~80%) |         | tr/ta                                           |      |         | 0.26            | ns       |       |
| Data Input Swing Differential    |         | V <sub>IN</sub>                                 | 300  |         | 1860            | mV       | 2     |
| Input Differential Impedance     |         | Z <sub>IN</sub>                                 | 90   | 100     | 110             | $\Omega$ |       |
| TX Disable                       | Disable |                                                 | 2.0  |         | V <sub>cc</sub> | V        |       |
|                                  | Enable  |                                                 | 0    |         | 0.8             | V        |       |
| TX Fault                         | Fault   |                                                 | 2.0  |         | V <sub>cc</sub> | V        |       |
|                                  | Normal  |                                                 | 0    |         | 0.8             | V        |       |
| Receiver                         |         |                                                 |      |         |                 |          |       |
| Centre Wavelength                |         | $\lambda_c$                                     | 1260 |         | 1580            | nm       |       |
| Receiver Sensitivity             |         |                                                 |      |         | -34             | dBm      | 3     |
| Receiver Overload                |         |                                                 | -9   |         |                 | dBm      | 3     |
| LOS De-Assert                    |         | LOS <sub>D</sub>                                |      |         | -38             | dBm      |       |
| LOS Assert                       |         | LOS <sub>A</sub>                                | -45  |         |                 | dBm      |       |
| LOS Hysteresis                   |         |                                                 | 1    |         | 4               | dB       |       |
| Data Output Swing Differential   |         | V <sub>out</sub>                                | 370  |         | 1800            | mV       | 4     |
| LOS                              | High    |                                                 | 2.0  |         | V <sub>cc</sub> | V        |       |
|                                  | Low     |                                                 | 0    |         | 0.8             | V        |       |

**Notes:**

1. The optical power is launched into SMF.
2. PECL input, internally AC-coupled and terminated.
3. Measured with a PRBS 2<sup>23</sup>-1 test pattern @155Mbps, BER  $\leq 1 \times 10^{-12}$
4. Internally AC-coupled.

## Timing and Electrical

**Table 5 - Timing and Electrical**

| Parameter                                       | Symbol         | Min | Typical | Max             | Unit |
|-------------------------------------------------|----------------|-----|---------|-----------------|------|
| Tx Disable Negate Time                          | t_on           |     |         | 1               | ms   |
| Tx Disable Assert Time                          | t_off          |     |         | 10              | μs   |
| Time To Initialize, including Reset of Tx Fault | t_init         |     |         | 300             | ms   |
| Tx Fault Assert Time                            | t_fault        |     |         | 100             | μs   |
| Tx Disable To Reset                             | t_reset        | 10  |         |                 | μs   |
| LOS Assert Time                                 | t_loss_on      |     |         | 100             | μs   |
| LOS De-assert Time                              | t_loss_off     |     |         | 100             | μs   |
| Serial ID Clock Rate                            | f_serial_clock |     |         | 400             | KHz  |
| MOD_DEF (0:2)-High                              | V <sub>H</sub> | 2   |         | V <sub>cc</sub> | V    |
| MOD_DEF (0:2)-Low                               | V <sub>L</sub> |     |         | 0.8             | V    |

## EEPROM Information

The SFP MSA defines a 256-byte memory map in EEPROM describing the transceiver's capabilities, standard interfaces, manufacturer, and other information, which is accessible over a 2 wire serial interface at the 8-bit address 1010000X (A0h). The memory contents refer to Table 6.

**Table 6 - EEPROM Serial ID Memory Contents (A0h)**

| Addr. | Field Size (Bytes) | Name of Field   | Hex                     | Description                  |
|-------|--------------------|-----------------|-------------------------|------------------------------|
| 0     | 1                  | Identifier      | 03                      | SFP                          |
| 1     | 1                  | Ext. Identifier | 04                      | MOD4                         |
| 2     | 1                  | Connector       | 07                      | LC                           |
| 3—10  | 8                  | Transceiver     | 00 08 04 00 00 00 00 00 | OC-3, Single mode long reach |
| 11    | 1                  | Encoding        | 03                      | NRZ                          |
| 12    | 1                  | BR, nominal     | 02                      | 155Mbps                      |

|       |    |                 |                                                    |                             |
|-------|----|-----------------|----------------------------------------------------|-----------------------------|
| 13    | 1  | Reserved        | 00                                                 |                             |
| 14    | 1  | Length (9um)-km | 78                                                 | 80km                        |
| 15    | 1  | Length (9um)    | FF                                                 | 80km                        |
| 16    | 1  | Length (50um)   | 00                                                 |                             |
| 17    | 1  | Length (62.5um) | 00                                                 |                             |
| 18    | 1  | Length (copper) | 00                                                 |                             |
| 19    | 1  | Reserved        | 00                                                 |                             |
| 20—35 | 16 | Vendor name     |                                                    | "FIBRENET"(ASC II )         |
| 36    | 1  | Reserved        | 00                                                 |                             |
| 37—39 | 3  | Vendor OUI      | 00 00 00                                           |                             |
| 40—55 | 16 | Vendor PN       | 47 50 2D 35 35 30 33 2D 31<br>32 43 44 20 20 20 20 | "SFP-03SM55-80C "(ASC II )  |
| 56—59 | 4  | Vendor rev      | xx xx xx xx                                        | xx.xx revision (ASC II )    |
| 60-61 | 2  | Wavelength      | 0A AA                                              | 1550nm                      |
| 62    | 1  | Reserved        | 00                                                 |                             |
| 63    | 1  | CC BASE         | xx                                                 | Check sum of bytes 0 - 62   |
| 64—65 | 2  | Options         | 00 1A                                              | LOS,TX_FAULT and TX_DISABLE |
| 66    | 1  | BR, max         | 00                                                 |                             |
| 67    | 1  | BR, min         | 00                                                 |                             |

|        |     |                  |                                                 |                                           |
|--------|-----|------------------|-------------------------------------------------|-------------------------------------------|
| 68—83  | 16  | Vendor SN        | xx xx xx xx xx xx xx xx xx xx<br>xx xx xx xx xx | ASC II                                    |
| 84—91  | 8   | Vendor date code | xx xx xx xx xx xx 20 20                         | Year(2 bytes),Month(2 bytes),Day(2 bytes) |
| 92     | 1   | Diagnostic type  | xx                                              | Diagnostics                               |
| 93     | 1   | Enhanced option  | 80                                              | Diagnostics(Optional Alarm/warning flags) |
| 94     | 1   | SFF-8472         | 01                                              | Diagnostics(SFF-8472 Rev 9.3)             |
| 95     | 1   | CC EXT           | xx                                              | Check sum of bytes 64 - 94                |
| 96—255 | 160 |                  |                                                 |                                           |

## Diagnostics

**Table 7 – Diagnostics Specification**


| Parameter    | Range      | Unit | Accuracy | Calibration         |
|--------------|------------|------|----------|---------------------|
| Temperature  | 0 to +70   | °C   | ±3°C     | Internal / External |
| Voltage      | 3.0 to 3.6 | V    | ±3%      | Internal / External |
| Bias Current | 0 to 100   | mA   | ±10%     | Internal / External |
| TX Power     | 0 to +5    | dBm  | ±3dB     | Internal / External |
| RX Power     | -33 to -9  | dBm  | ±3dB     | Internal / External |

## Digital Diagnostic Memory Map

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).

The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.


The digital diagnostic memory map specific data field defines as following.

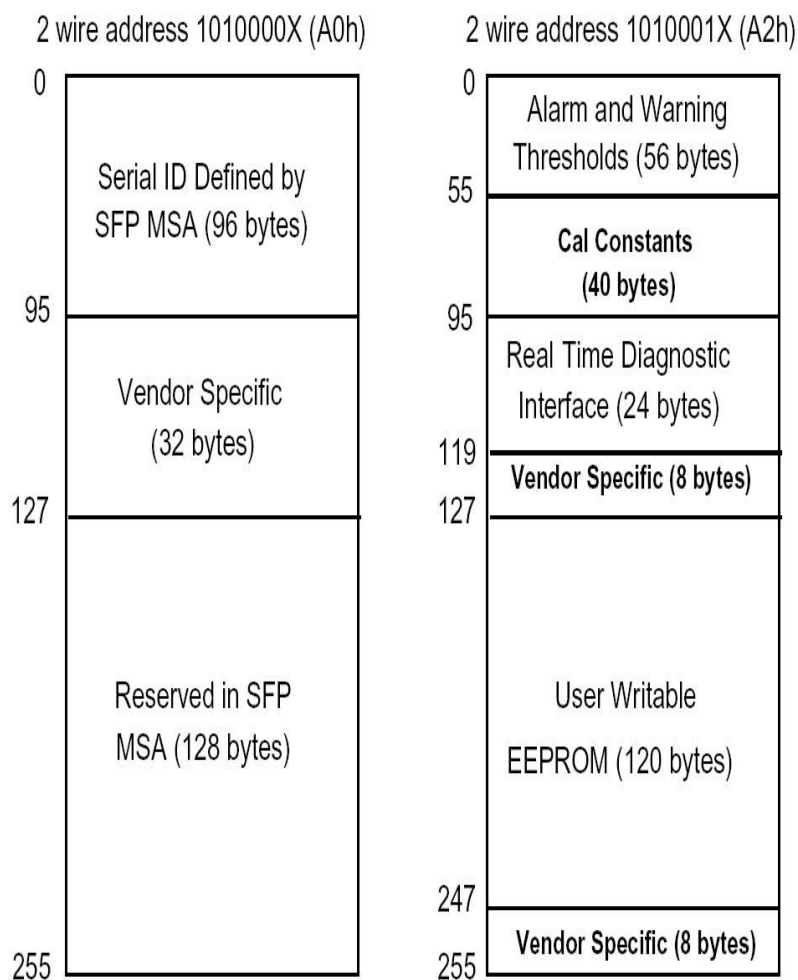



## Pin Assignment

### Pin Diagram

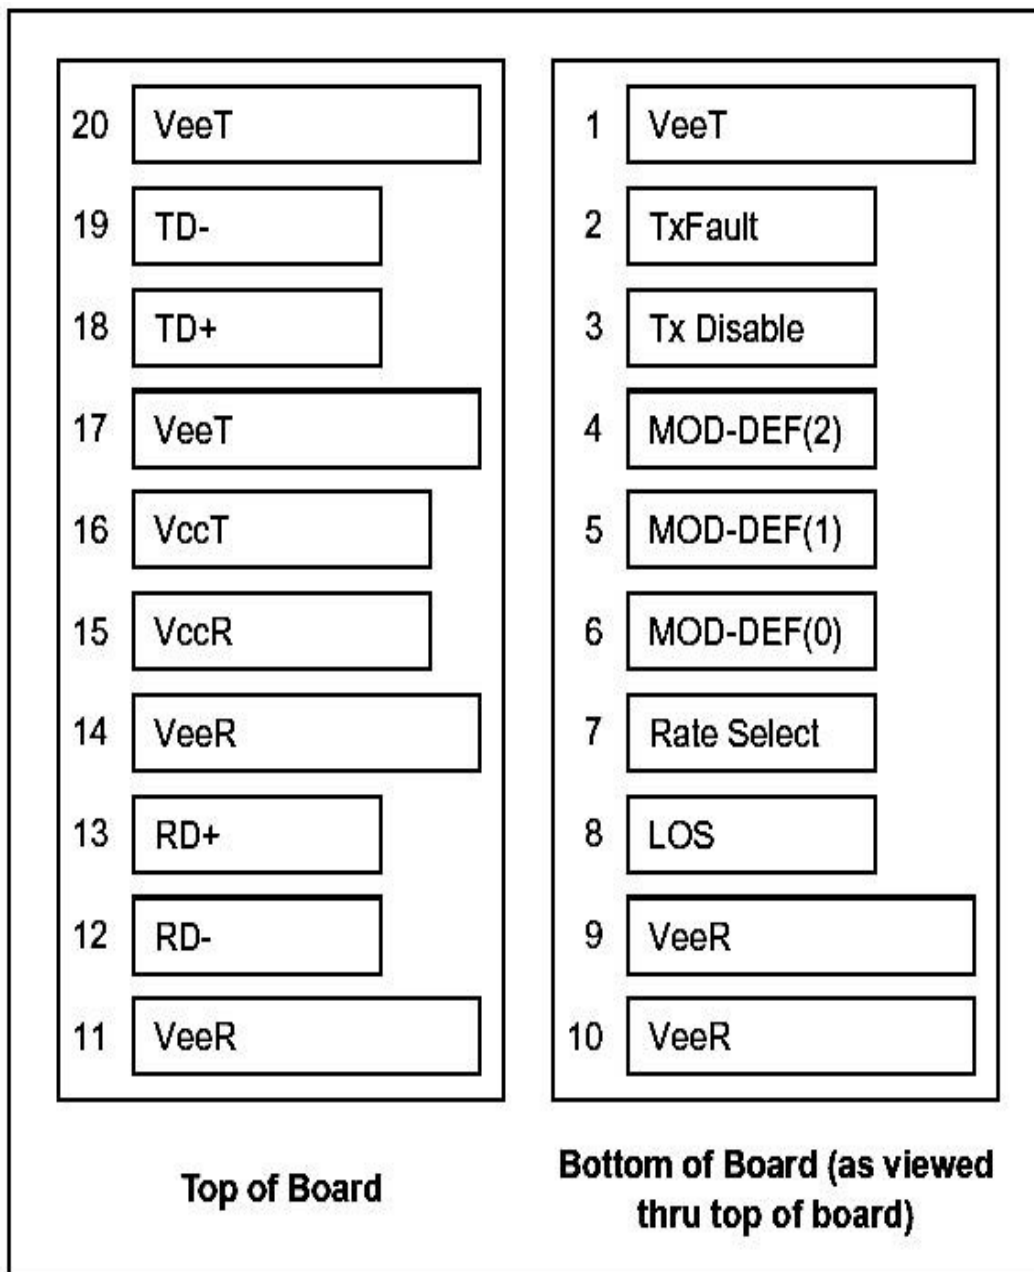

## Pin Descriptions


| Pin | Signal Name      | Description                  | Plug Seq. | Notes  |
|-----|------------------|------------------------------|-----------|--------|
| 1   | V <sub>EET</sub> | Transmitter Ground           | 1         |        |
| 2   | TX FAULT         | Transmitter Fault Indication | 3         | Note 1 |
| 3   | TX DISABLE       | Transmitter Disable          | 3         | Note 2 |
| 4   | MOD_DEF(2)       | SDA Serial Data Signal       | 3         | Note 3 |
| 5   | MOD_DEF(1)       | SCL Serial Clock Signal      | 3         | Note 3 |
| 6   | MOD_DEF(0)       | TTL Low                      | 3         | Note 3 |
| 7   | Rate Select      | Not Connected                | 3         |        |
| 8   | LOS              | Loss of Signal               | 3         | Note 4 |
| 9   | V <sub>EER</sub> | Receiver ground              | 1         |        |
| 10  | V <sub>EER</sub> | Receiver ground              | 1         |        |
| 11  | V <sub>EER</sub> | Receiver ground              | 1         |        |
| 12  | RD-              | Inv. Received Data Out       | 3         | Note 5 |
| 13  | RD+              | Received Data Out            | 3         | Note 5 |
| 14  | V <sub>EER</sub> | Receiver ground              | 1         |        |
| 15  | V <sub>CCR</sub> | Receiver Power Supply        | 2         |        |
| 16  | V <sub>CCT</sub> | Transmitter Power Supply     | 2         |        |
| 17  | V <sub>EET</sub> | Transmitter Ground           | 1         |        |
| 18  | TD+              | Transmit Data In             | 3         | Note 6 |
| 19  | TD-              | Inv. Transmit Data In        | 3         | Note 6 |
| 20  | V <sub>EET</sub> | Transmitter Ground           | 1         |        |

### Notes:


Plug Seq.: Pin engagement sequence during hot plugging.

- 1) TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and V<sub>cc</sub>+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- 2) TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:  
 Low (0 to 0.8V): Transmitter on  
 (>0.8V, < 2.0V): High Undefined Transmitter  
 (2.0 to 3.465V): Disabled Transmitter  
 Open: Disabled
- 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board.  
 The pull-up voltage shall be V<sub>ccT</sub> or V<sub>ccR</sub>.  
 Mod-Def 0 is grounded by the module to indicate that the module is present  
 Mod-Def 1 is the clock line of two wire serial interface for serial ID  
 Mod-Def 2 is the data line of two wire serial interface for serial ID
- 4) LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor. Pull up voltage between 2.0V and V<sub>cc</sub>+0.3V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.
- 5) RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.
- 6) TD-/+ : These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

## Recommended Interface Circuit

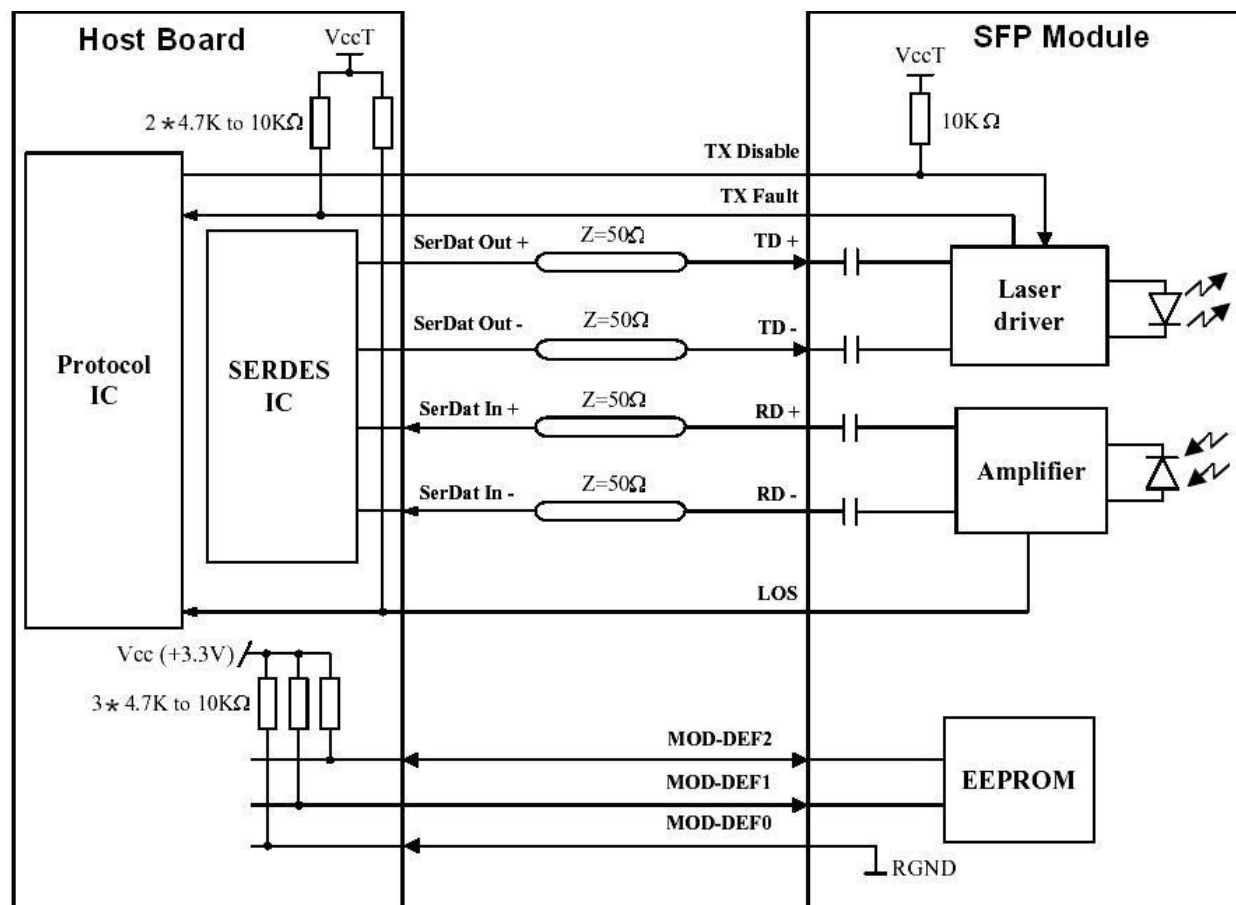

## Mechanical Dimensions

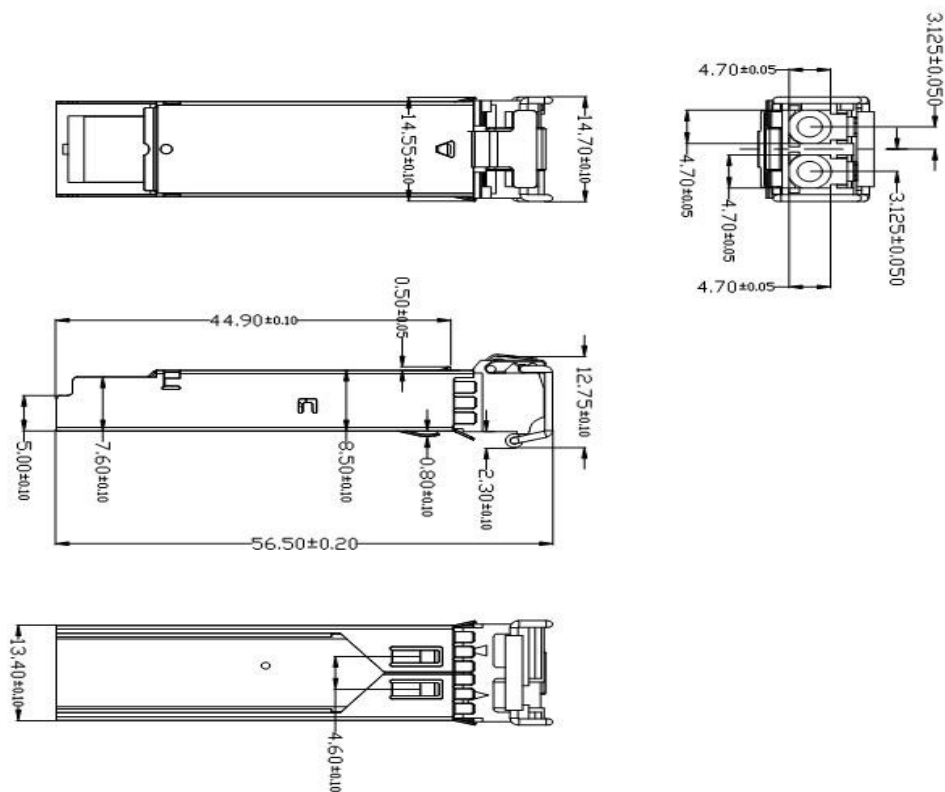

Tel: +44 1666 715 715

E-mail: [email@fibrenet.co.uk](mailto:email@fibrenet.co.uk)

Web : [www.fibrenet.co.uk](http://www.fibrenet.co.uk)