

SFP-1G-LX

1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM

Product Features

- Transceiver unit with independent
- 1310nm FP Laser diode transmitter
- InGaAs PIN photodiode receiver
- Duplex LC Connector
- Dual Data-rate of 1.25Gbps/1.0625Gbps Operation
- Up to 20km on 9/125µm SMF
- Standard serial ID information compliant with SFP MSA
- Digital Diagnostic Monitor Interface
- Very low EMI and excellent ESD protection
- +3.3V single power supply
- Full Duplex Transmission
- RoHS compliant
- Case operating temperature
- Commercial: 0°C to +70°C
- Extended: -10°C to +80°C
- Industrial: -40°C to +85°C

Applications


- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Switched backplane applications
- Router/Server interface
- Other optical transmission systems

Description

The SFP transceivers are high performance, cost effective modules supporting dual data-rate of 1.25Gbps/1.0625Gbps and 20km transmission distance with SMF. The transceiver consists of three sections: a FP laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

Functional Diagram

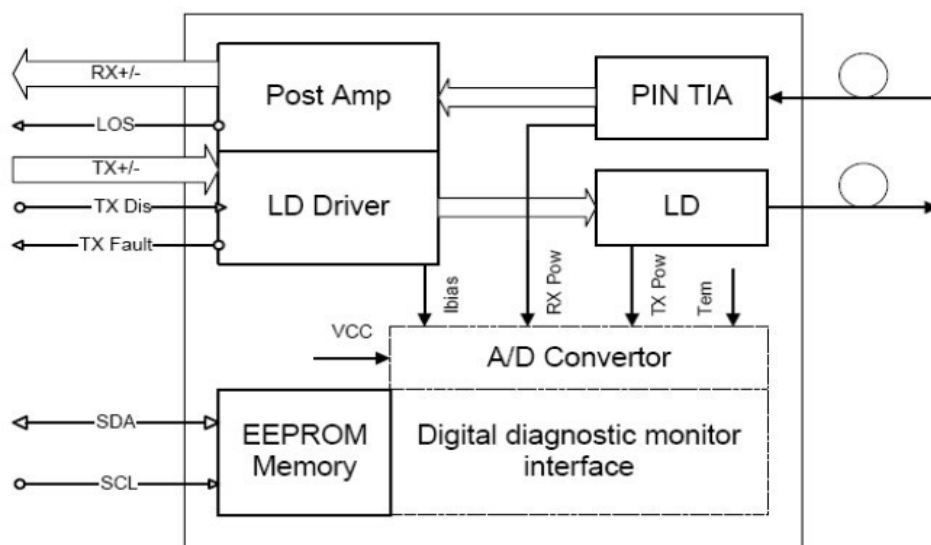

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max	Unit	Notes
Supply Voltage	Vcc	-0.5	3.60	V	
Storage Temperature		-40	85	°C	
Relative Humidity		5	85	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module.

General Operating Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Data Rate	Gigabit Ethernet			1.25		Gb/s	
	Fiber Channel			1.0625			
Supply Voltage		Vcc	3.1	3.3	3.5	V	
Supply Current		Icc			220	mA	
Operating Case Temperature		Tc	0		70	°C	
			-10		80		
			-45		85		

Electrical Input/Output Characteristics

• Transmitter

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Diff. Input Voltage Swing			300		1800	mVpp	1
Tx Disable Input	H	V _{IH}	2.0		V _{CC} +0.3	V	
	L	V _{IL}	0		0.8		
Tx Fault Output	H	V _{OH}	2.0		V _{CC} +0.3	V	2
	L	V _{OL}	0		0.8		
Input Diff. Impedance		Z _{in}		100		Ω	

• Receiver

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Diff. Output Voltage Swing			400		1000	mVpp	3
Rx LOS Output	H	V _{OH}	2.0		V _{CC} +0.3	V	2
	L	V _{OL}	0		0.8		

Note 1) TD+/- are internally AC coupled with 100Ω differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and V_{CC}+0.3V.

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

Optical Characteristics

• Transmitter

Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Ave. Output Power (Enable)	10km	P _o	-9		-3	dBm	1
	20km						
Extinction Ratio		ER	9			dB	1
Rise/Fall Time (20%-80%)		Tr-Tf			0.26	ns	2
Wavelength Range			1270		1360	nm	
Spectral Width (RMS)					4	nm	
Output Optical Eye		Compliant with IEEE802.3 z (class 1 user safety)					

● Receiver


Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Operating Wavelength			1270		1610	nm	
Sensitivity	10km	Pimin			-22	dBm	3
	20km						
Min. Overload		Pimax	-3			dBm	3
LOS Assert		Pa	-35			dBm	
LOS De-assert		Pd			-23	dBm	
LOS Hysteresis		Pd-Pa	0.5		6	dB	

Note 1) Measured at 1250 Mb/s with PRBS 2²³ – 1 NRZ test pattern.

Note 2) Unfiltered, measured with a PRBS 2²³-1 test pattern @1.25Gbps

Note 3) Measured at 1250 Mb/s with PRBS 2²³ – 1 NRZ test pattern for BER < 1x10⁻¹²

Pin Definitions and Functions

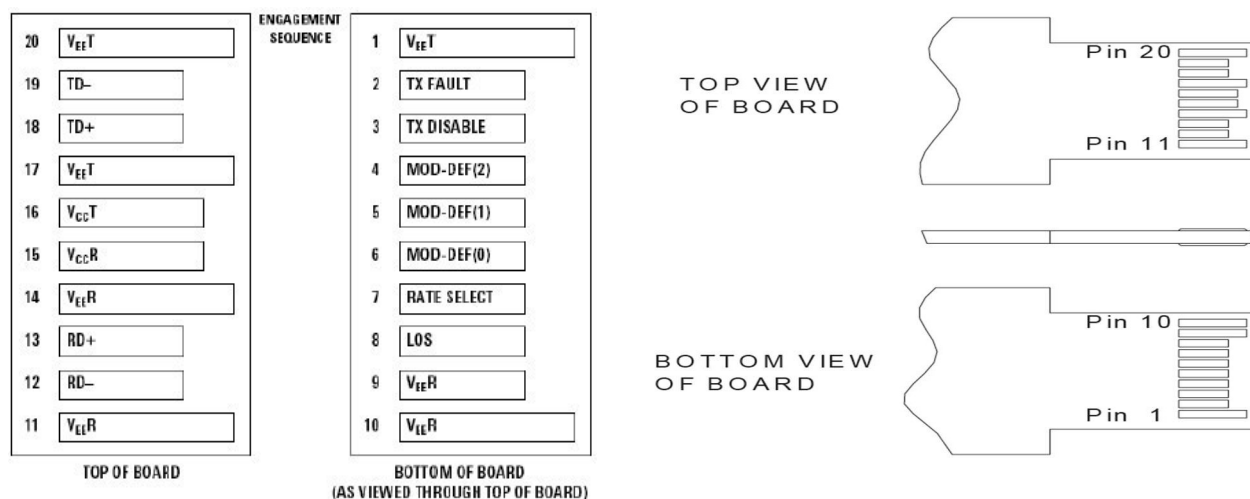

PIN #	Name	Function	Notes
1	VeeT	Tx ground	
2	Tx Fault	Tx fault indication, Open Collector Output, active "H"	1
3	Tx Disable	LVTTTL Input, internal pull-up, Tx disabled on "H"	2
4	MOD-DEF2	2 wire serial interface data input/output (SDA)	3
5	MOD-DEF1	2 wire serial interface clock input (SCL)	3
6	MOD-DEF0	Model present indication	3
7	Rate select	No connection	
8	LOS	Rx loss of signal, Open Collector Output, active "H"	4
9	VeeR	Rx ground	
10	VeeR	Rx ground	
11	VeeR	Rx ground	
12	RD-	Inverse received data out	5
13	RD+	Received data out	5

14	VeeR	Rx ground	
15	VccR	Rx power supply	
16	VccT	Tx power supply	
17	VeeT	Tx ground	
18	TD+	Transmit data in	6
19	TD-	Inverse transmit data in	6
20	VeeT	Tx ground	

Note 1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10KΩ resistor on the host board.

Note 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10K Ω resistor. Its states are:

Low (0 – 0.8V): Transmitter on	(>0.8, < 2.0V): Undefined
High (2.0V~Vcc+0.3V): Transmitter Disabled	Open: Transmitter Disabled

Note 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be between 2.0V~Vcc+0.3V.

Mod-Def 0 has been grounded by the module to indicate that the module is present

Mod-Def 1 is the clock line of two wire serial interface for serial ID

Mod-Def 2 is the data line of two wire serial interface for serial ID

Note 4) When high, this output indicates loss of signal (LOS). Low indicates normal operation.

Note 5) RD+/-: These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.


Note 6) TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

Diagnostics


Diagnostics Specification


Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70 -40 to +85	°C	±3°C	Internal/ External
Voltage	3.0 to 3.6	V	±3%	Internal/ External
Bias Current	2 to 80	mA	±10%	Internal/ External
TX Power	-12 to -1	dBm	±3dB	Internal/ External
RX Power	-25 to 0	dBm	±3dB	Internal/ External

Typical Interface Circuit

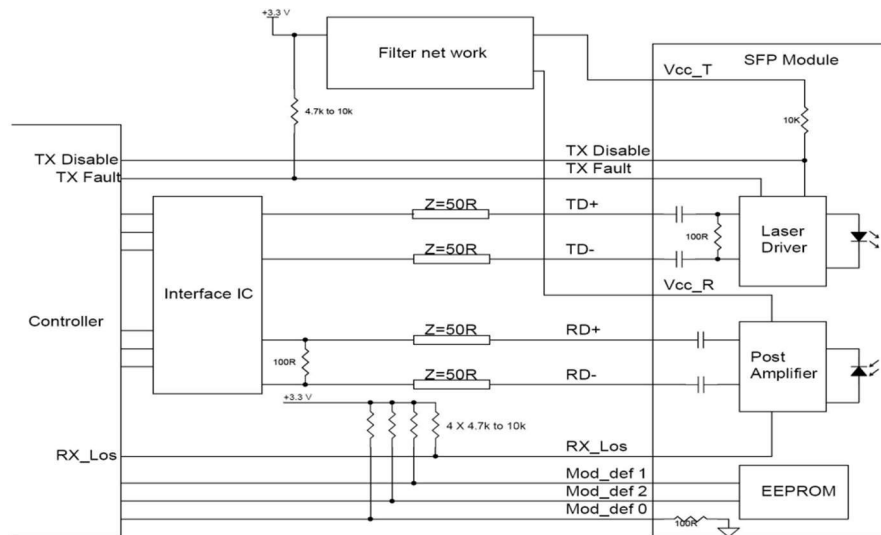

Package Dimensions

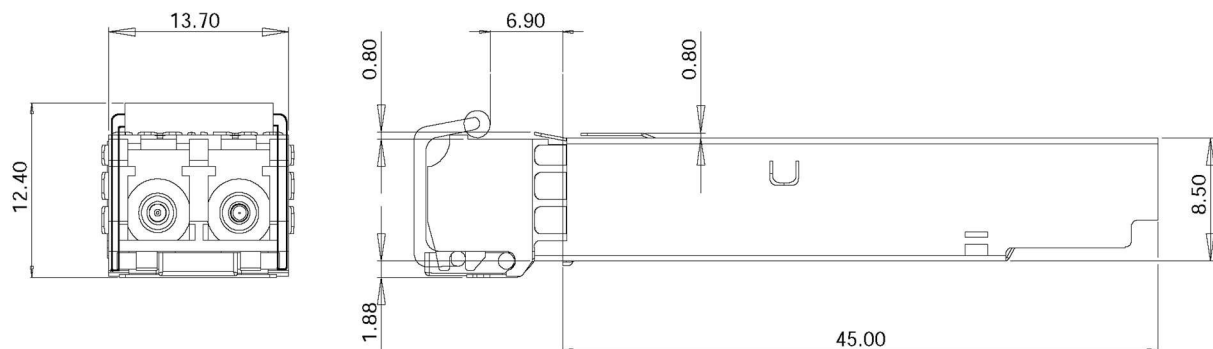

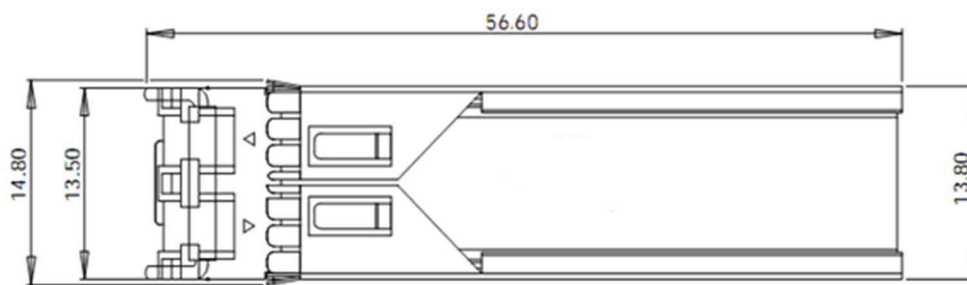

Mechanical Drawing

ORDERING INFORMATION

Part Number	Description
GLC-LH-SMD-C	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Cisco compatible
EX-SFP-1GE-LX-J	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Juniper compatible
SFP-GE-LX-SM1310-H / 0231A563-H	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Huawei compatible
XCVR-010M31-CN	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Ciena compatible
J4859C-HP / J4859D-HP	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – HPE Aruba compatible
JD119B-H3	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – H3C compatible
10052-EX	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Extreme compatible
E1MG-LX-OM-B	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Brocade compatible
1AB187280031-N	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Nokia compatible
PAN-SFP-LX-PA	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM – Palo Alto compatible